

Handyman Scope of Work — 7540 W 92nd Ave Crown Point

Room-by-room task outline with estimated minutes and relevant photos.

Quick totals

- Light fixtures (non-LED): **3**
- 6" surface-mount LEDs: **4** (30 min each standard)
- Wall plates: **~10**
- Baseboards (LF by room): Bedroom 4 47.0, Bedroom 5 46.0, Bedroom 6 55.2, Basement Hallway P1 75.6, P2 40.6 (Total ~264.4 LF)
- Prefab door kits: **2** (basement hallway doorways)
- Stick-down flooring install: **~931 sf** (basement hallways + basement main room + bedroom 5)

Basement Hallway (2 parts)

120 min (~2.00 hrs)


Part 1: 28×9.8×8 ft (~274 sf) • Part 2: 16.3×4×8 ft (~65 sf)

Scope: Replace (2) water-damaged doorways with prefab door kits; install stick-down floor in both hallway parts.

Room photos



Handyman photos

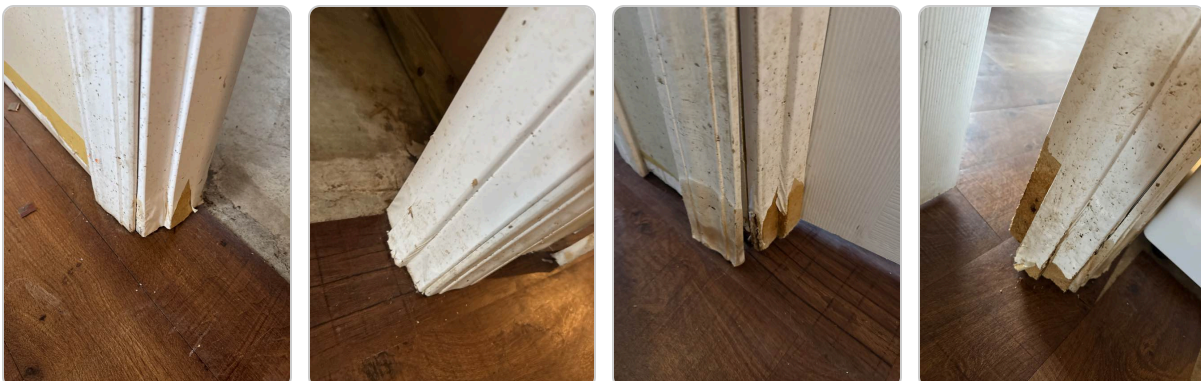

Foyer

11.1×8.5×13 ft • ~94 sf • **105 min**

Install (2) light fixtures (30 min + 75 min) (est. 105 min)

Handyman photos



Kitchen

11.75×21.9×8 ft • ~257 sf • **60 min**

Install (2) 6" surface-mount LED lights (30 min each) (est. 60 min)

Handyman photos




Dining Room

14.65×19.69×10 ft • ~288 sf • **45 min**

Install (1) chandelier/light fixture (45 min) (est. 45 min)

Handyman photos





1st Floor Hallway

25×3×8 ft • ~75 sf • **90 min**

Install (2) light fixtures (est. 90 min)

Handyman photos

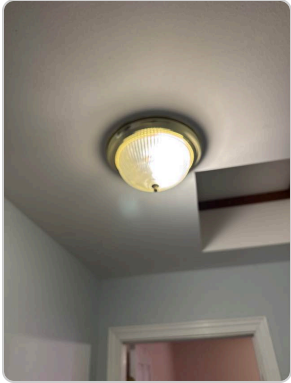


Bedroom 1

16.3×15.1×8 ft • ~246 sf • **90 min**

Install (1) ceiling fan (est. 90 min)

Handyman photos




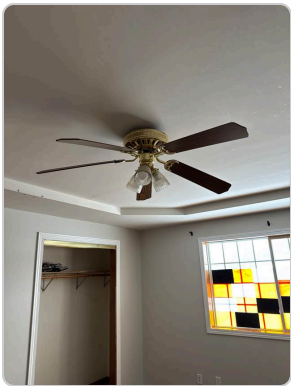


Main Bedroom

14.9×18.3×8 ft • ~273 sf • 45 min

Install ~10 wall plates (est. 45 min)

Room photos

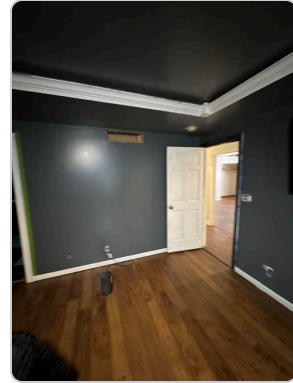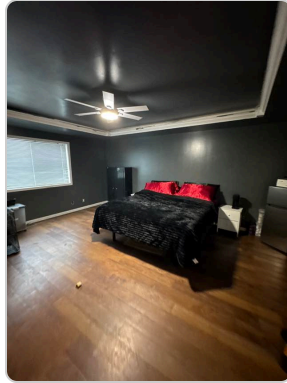



Handyman photos

Main Bathroom

14.6×8×8 ft • ~117 sf • 210 min

Replace (2) faucets; install (2) 6" surface-mount LEDs; replace (1) shower light; replace (1) main bath door knob (est. 210 min)

Handyman photos

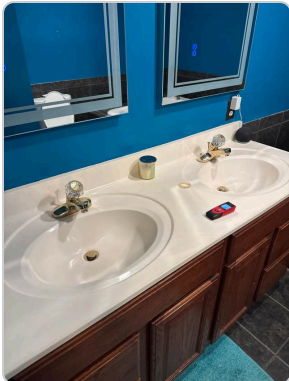

Bathroom 1

6.6×8.6×8 ft • ~57 sf • **60 min**

Replace faucet; replace panel mirror; replace strip light with vanity fixture; replace shower light with flush-mount style fixture (est. 60 min)

Handyman photos




Bedroom 3

10.4×9.9×8 ft • ~103 sf • **90 min**

Install door casing on (1) standard opening (interior casing) (est. 90 min)

Handyman photos

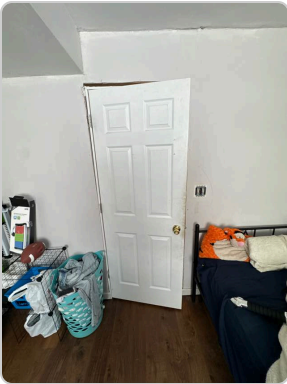

Bedroom 4




9.8×13.7×8 ft • ~134 sf • **134 min**

Install new baseboards around perimeter; install door casing on (1) standard opening (interior casing) (est. 134 min)

Baseboards: ~47.0 LF

Room photos

Handyman photos

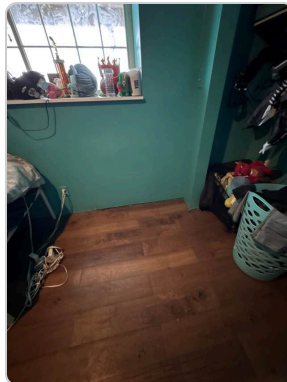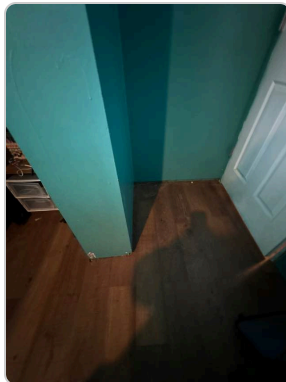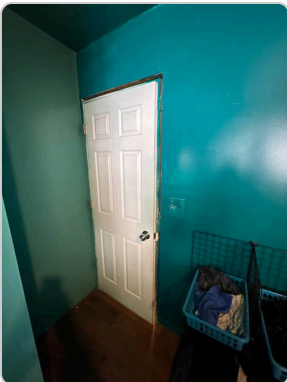





Bedroom 6

12.8×14.8×8 ft • ~189 sf • 194 min





Install new baseboards around perimeter; install door casing on (2) standard openings (interior casing) (est. 194 min)

Baseboards: ~55.2 LF

Room photos

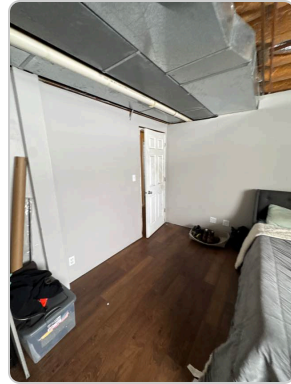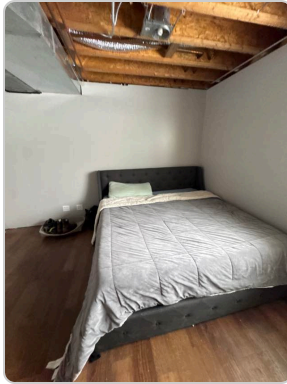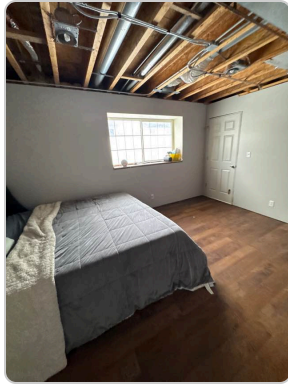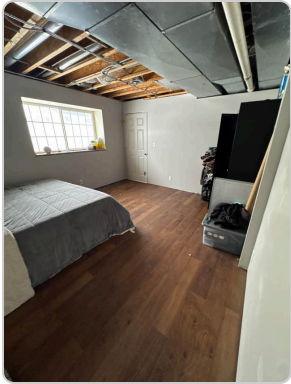

Handyman photos

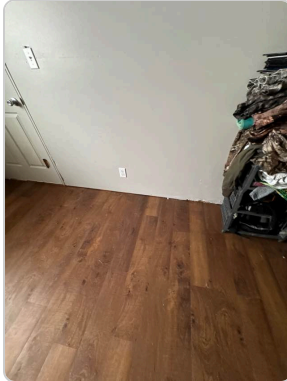

Bedroom 5 (SAME LAYOUT AS BEDROOM 4 — no pics)

10×13×8 ft • ~130 sf • 178 min

Install new baseboards around perimeter; install door casing on (1) standard opening (both sides); install stick-down floor (est. 178 min)

Baseboards: ~46.0 LF

Stick-down floor: ~130 sf



(No photos available — SAME LAYOUT AS BEDROOM 4)

Basement Main Room

15.55×29.7×8 ft • ~462 sf

Install stick-down floor

Room photos

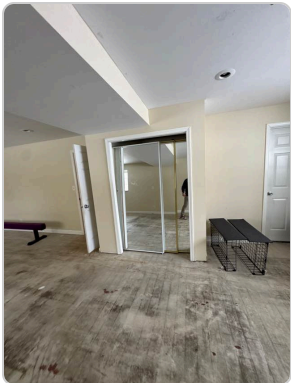

Handyman photos