

Handyman Scope of Work — 7540 W 92nd Ave Crown Point

Re-ordered to match walkthrough order (basement regrouped).

Quick totals

- 6" surface-mount LEDs: **4** (30 min each standard)
- Wall plates: **~10**
- Baseboards total: **~264.4 LF** (by room: Bedroom 4 47.0, Bedroom 5 46.0, Bedroom 6 55.2, Basement Hallway P1 75.6, P2 40.6)
- Prefab door kits: **2**
- Stick-down floor: **~931 sf** (Basement Hallways + Basement Main Room + Bedroom 5)

Foyer

11.1×8.5×13 ft **105 min**

Install (2) light fixtures (30 min + 75 min)

Handyman photos



Kitchen

11.75×21.9×8 ft **60 min**

Install (2) 6" surface-mount LED lights (30 min each)

Handyman photos




Dining Room

14.65×19.69×10 ft **45 min**

Install (1) chandelier/light fixture (45 min)

Handyman photos


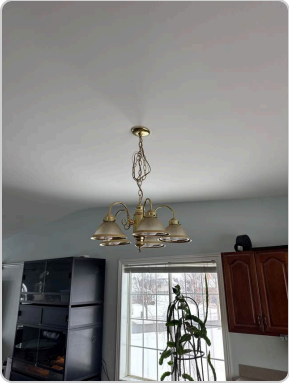


1st Floor Hallway

25×3×8 ft **90 min**

Install (2) light fixtures

Handyman photos

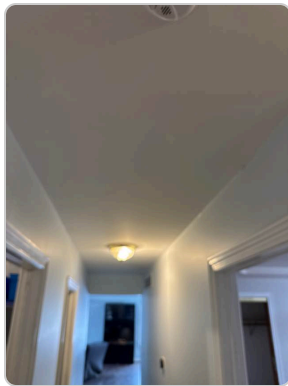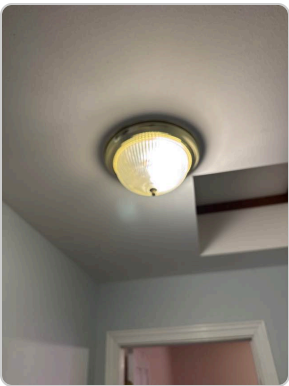


Bedroom 1

16.3×15.1×8 ft **90 min**

Install (1) ceiling fan

Handyman photos




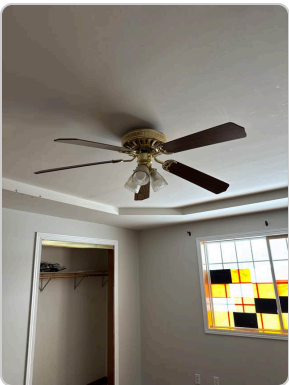


Main Bedroom

14.9×18.3×8 ft 45 min

Install ~10 wall plates

Room photos

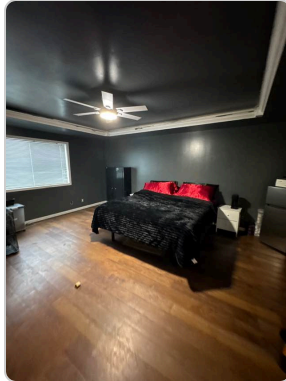


Handyman photos

Main Bathroom

14.6×8×8 ft 210 min

Replace (2) faucets; install (2) 6" surface-mount LEDs; replace (1) shower light; replace (1) main bath door knob

Handyman photos



Bathroom 1

6.6×8.6×8 ft **60 min**

Replace faucet; replace panel mirror; replace strip light with vanity fixture; replace shower light with flush-mount style fixture

Handyman photos







Basement Hallway (2 parts)

Part 1: 28×9.8×8 ft (~274 sf); Part 2: 16.3×4×8 ft (~65 sf) **120 min**


Scope: Replace (2) water-damaged doorways with prefab door kits; install stick-down floor in both hallway parts.

Baseboards: ~75.6 LF (P1) + 40.6 LF (P2)

Room photos

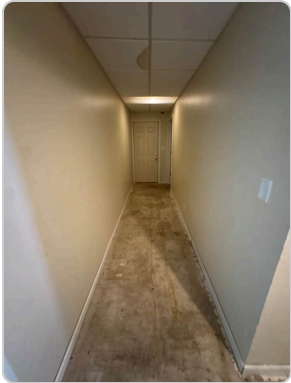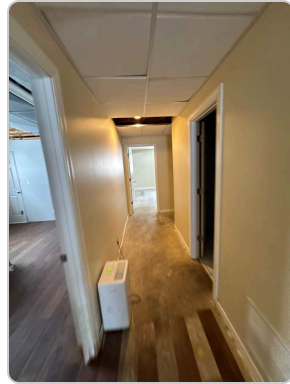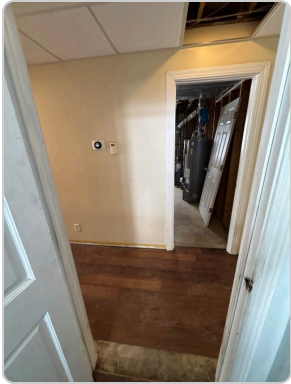

Handyman photos




Bedroom 3

10.4×9.9×8 ft **90 min**

Install door casing on (1) standard opening (interior casing)

Handyman photos



Bedroom 4



9.8×13.7×8 ft **134 min**

Install new baseboards around perimeter; install door casing on (1) standard opening (interior casing)

Baseboards: ~47.0 LF

Room photos

Handyman photos

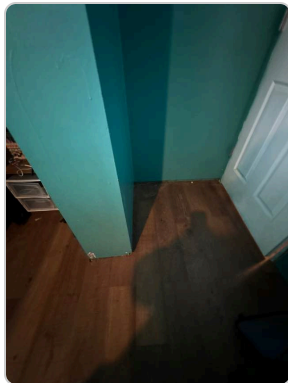

Bedroom 5 (SAME LAYOUT AS BEDROOM 4 — no pics)

10×13×8 ft (~130 sf) **178 min**

Install new baseboards around perimeter; install door casing on (1) standard opening (both sides); install stick-down floor

Baseboards: ~46.0 LF

Stick-down floor: ~130 sf

(No photos available — SAME LAYOUT AS BEDROOM 4)



Bedroom 6

12.8x14.8x8 ft 194 min





Install new baseboards around perimeter; install door casing on (2) standard openings (interior casing)

Baseboards: ~55.2 LF

Room photos

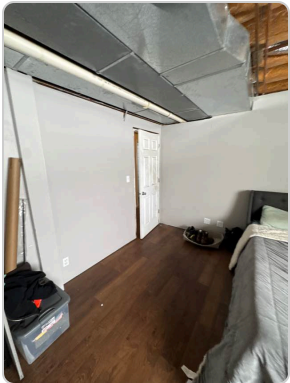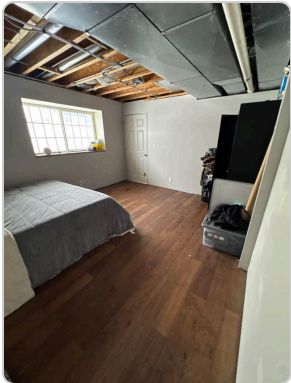

Handyman photos

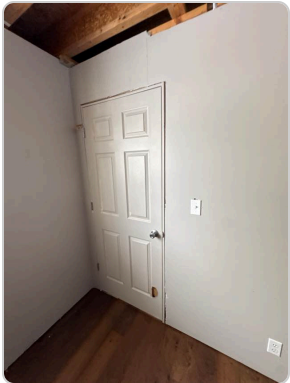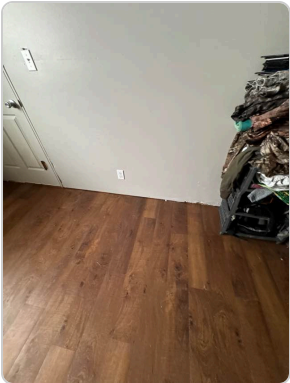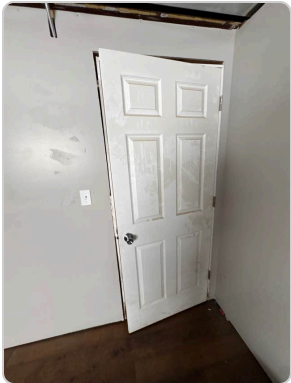




Basement Main Room

15.55×29.7×8 ft (~462 sf)

Install stick-down floor

Stick-down floor: ~462 sf

Room photos

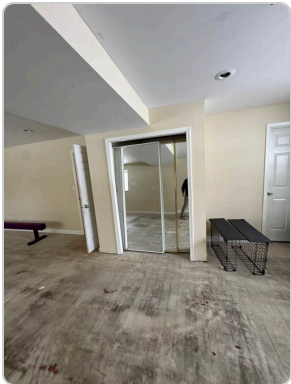

Handyman photos