

Handyman Scope of Work — 7540 W 92nd Ave Crown Point

Re-ordered to match walkthrough order (basement regrouped). Times shown in hours when > 60 minutes.

Quick totals (no times)

- Total fixture swaps/installs: **10** (includes 6" surface-mount LEDs)
- Door casing installs: **5** standard openings
- Baseboards: **5 areas/rooms, ~264 LF**
- Stick-down floor install: **~767 sf** (includes Basement Hallway Part 1 at ~40% area)

Foyer — 11.1×8.5×13 ft

1.75 hrs

Install (2) light fixtures (30 min + 75 min)

Handyman photos



Kitchen — 11.75×21.9×8 ft

60 min

Install (2) 6" surface-mount LED lights (30 min each)

Handyman photos




Dining Room — 14.65×19.69×10 ft

45 min

Install (1) chandelier/light fixture (45 min)

Handyman photos


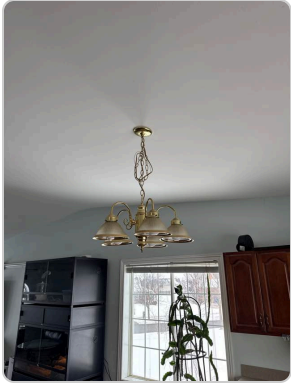


1st Floor Hallway — 25×3×8 ft

1.50 hrs

Install (2) light fixtures

Handyman photos

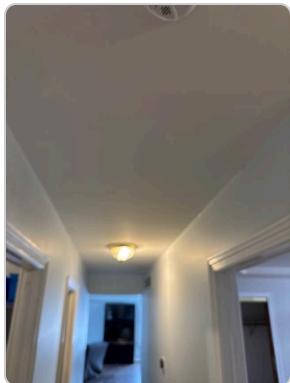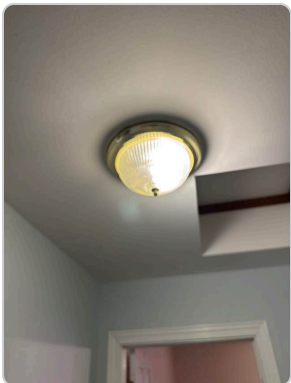


Bedroom 1 — 16.3×15.1×8 ft

1.50 hrs

Install (1) ceiling fan

Handyman photos




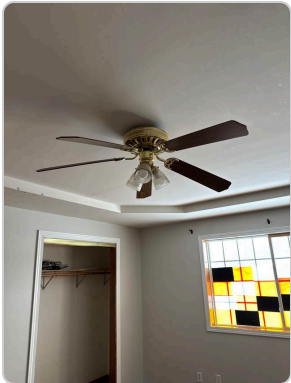


Main Bedroom — 14.9×18.3×8 ft

45 min

Install ~10 wall plates

Room photos

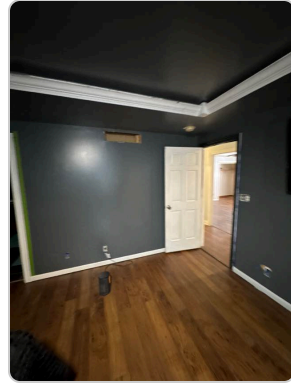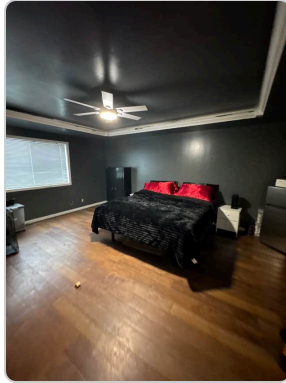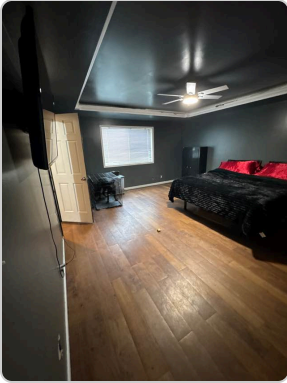


Handyman photos

Main Bathroom — 14.6×8×8 ft

3.50 hrs

Replace (2) faucets; install (2) 6" surface-mount LEDs; replace (1) shower light; replace (1) main bath door knob

Handyman photos

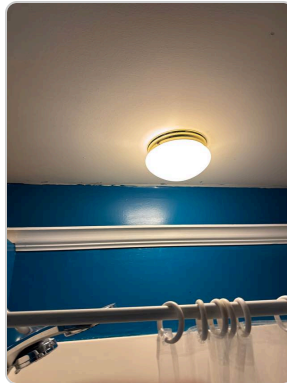

Bathroom 1 — 6.6×8.6×8 ft

60 min

Replace faucet; replace panel mirror; replace strip light with vanity fixture; replace shower light with flush-mount style fixture

Handyman photos



Basement Hallway (2 parts) — Part 1: 28×9.8×8 ft (~274 sf, ~40% install ≈110 sf); Part 2: 16.3×4×8 ft (~65 sf) 2.00 hrs

Replace (2) water-damaged doorways with prefab door kits; install stick-down floor in both hallway parts.

Room photos



Handyman photos




Bedroom 3 — 10.4×9.9×8 ft

1.50 hrs

Install door casing on (1) standard opening (interior casing)

Handyman photos

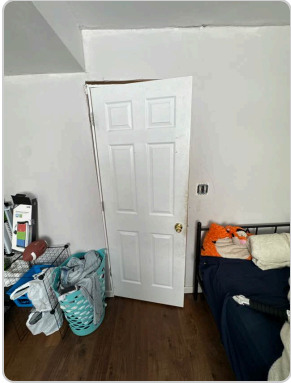




Bedroom 4 — 9.8×13.7×8 ft

2.23 hrs

Install new baseboards around perimeter; install door casing on (1) standard opening (interior casing)

Room photos

Handyman photos

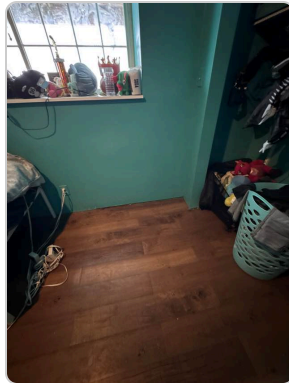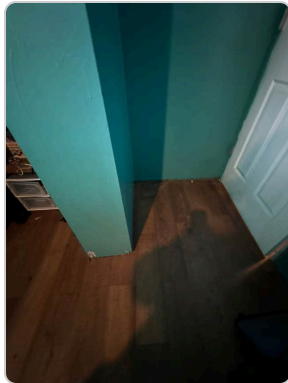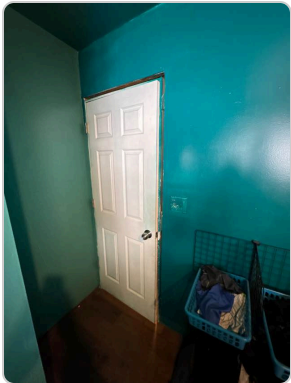

Bedroom 5 (SAME LAYOUT AS BEDROOM 4 — no pics) — 10×13×8 ft (~130 sf)

2.97 hrs

Install new baseboards around perimeter; install door casing on (1) standard opening (both sides); install stick-down floor



(No photos available — SAME LAYOUT AS BEDROOM 4)

Bedroom 6 — 12.8x14.8x8 ft




3.23 hrs

Install new baseboards around perimeter; install door casing on (2) standard openings (interior casing)

Room photos

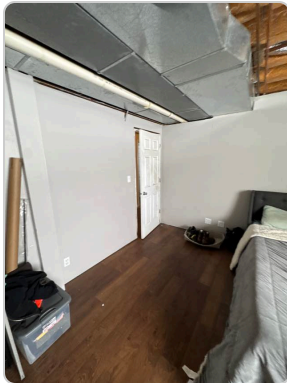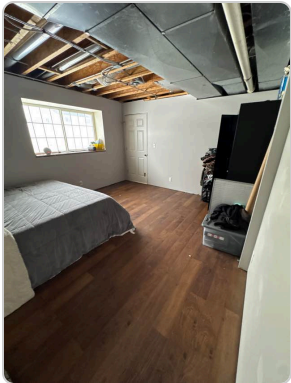



Handyman photos

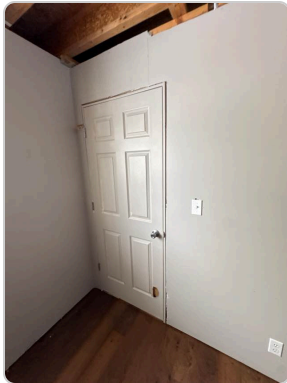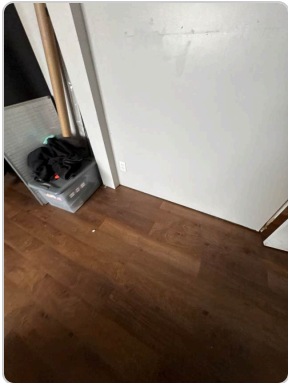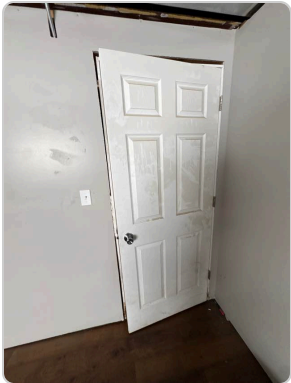

Basement Main Room — 15.55×29.7×8 ft (~462 sf)

Install stick-down floor (~462 sf)

Room photos

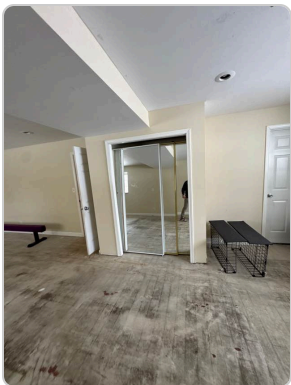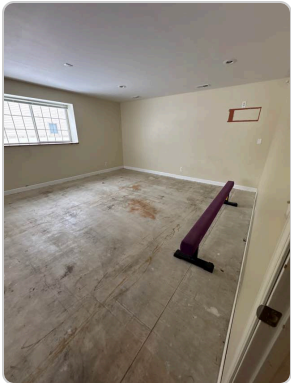

Handyman photos